



KM450: Manual 450 K Type Step

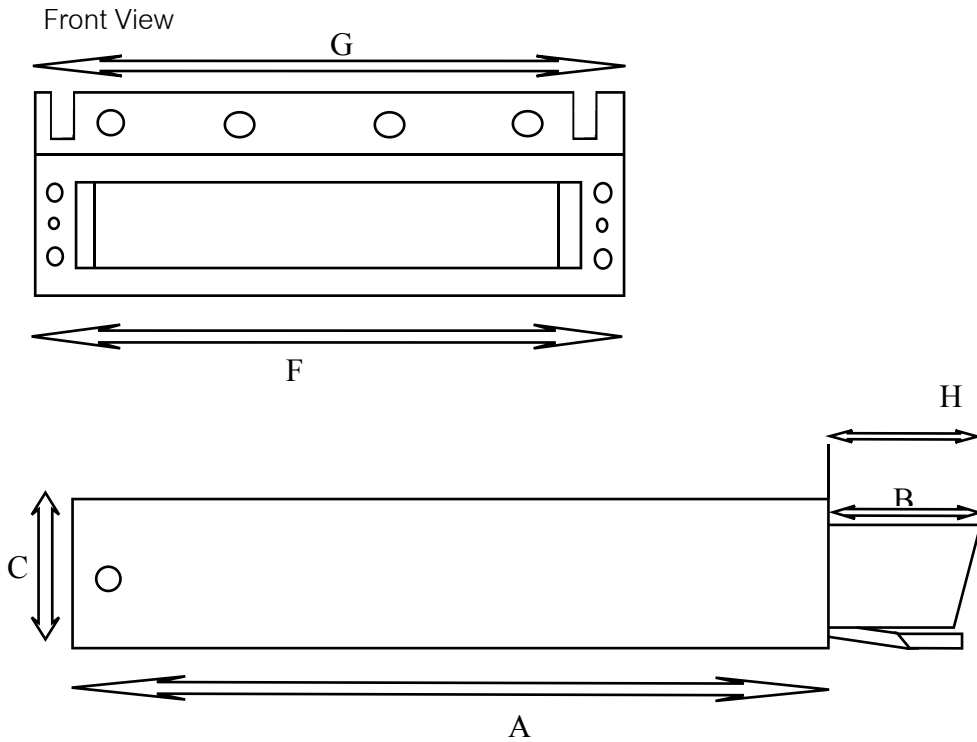

Side View: Step Stowed

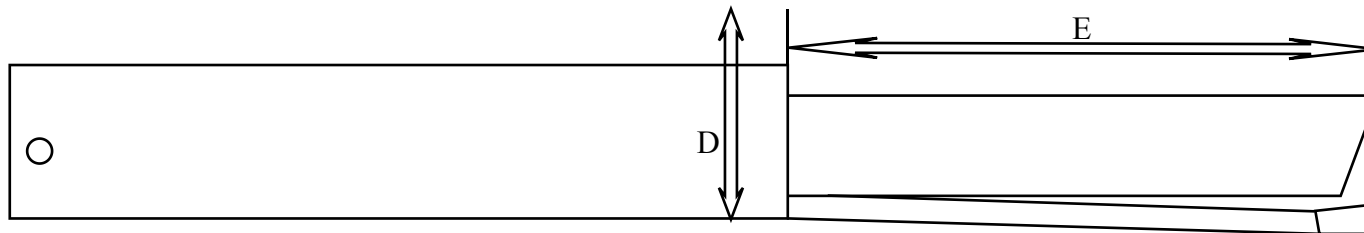

Side View: Step Deployed

	Description	MM	Inches
A	Case depth to start of visible tread	406	16
B	Tread depth when stowed	57	2 2/8
C	Case thickness	76	3
D	Overall Height	115	4 1/2
E	Visible tread deployed	250	10
F	Tread width	456	18
G	Case width	535	21
H	Front of tread to mounting point 1	60	2 3/8

(Drawings are NOT to scale)