TE600BZ: Electric T Type Step

Side View: Step Stowed

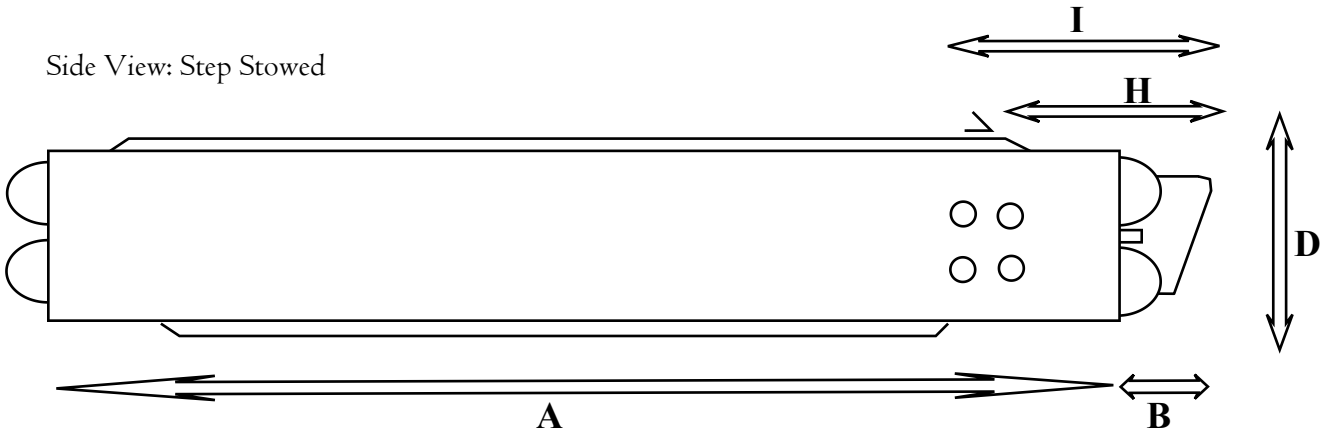

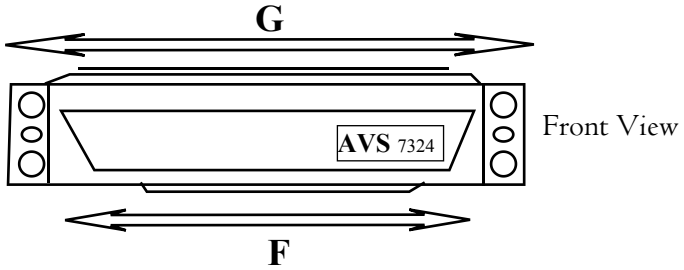

Front View

	Description	MM	Inches
A	Case depth to start of visible tread	350	13.8
B	Tread depth when stowed	76	3
C	Case thickness	64	2 2/3
D	Overall Height	76	3
E	Visible tread deployed	254	10
F	Tread width	610	24
G	Case width	686	27
H	Front of tread to mounting point 1	70	2 3/4
I	Front of tread to mounting point 2	107	4 1/4

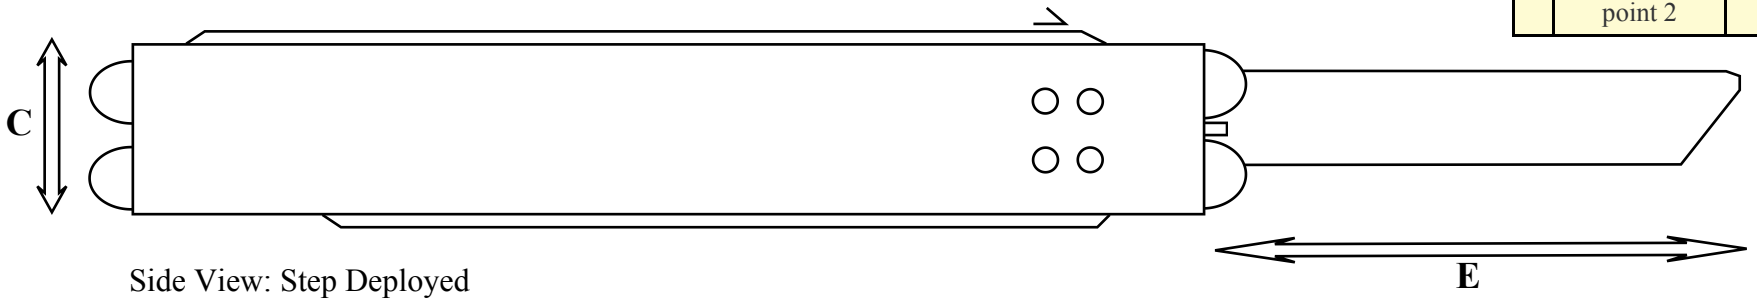

Side View: Step Deployed

(Drawings are NOT to scale)